



Tempostop bib tap



Tempostop bib lever operated tap

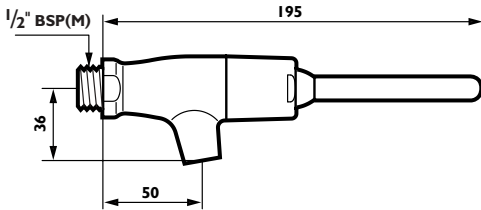

Data

Tempostop basin taps are also available for Bib and Bib lever operations.

Automatic shut-off push-button bib tap

- Shut-off delay ~ 15 sec. (± 5 sec)
- Adjustable flow rate, pre-set 6 L/min. Flow straightener
- Body in chrome-plated brass

On request, shut-off delay 7 sec.

Code numbers

746000 - Tempostop bib tap.

746410 - Tempostop bib lever tap.

Pressures and flow-rates

• Dynamic pressure	bar	0.5	1	2	3	4	5
• Maximum adjustable flow-rate	l/s	0.14	0.20	0.30	0.36	0.40	0.44
• Recommended pressure:		0.3 to 5 bar.					

Description

Tempostop bib tap and the Tempostop bib lever operated with safe round top lever.

- Pre-set flow rate 6 L/min, adjustable by the installer without dismantling the mechanism or isolating water (*DELABIE patented*).
- Shut-off delay ~ 15 sec. (± 5 sec).
- Flow-straightener.
- Safe water temperatures.

Basin taps and mixers should always be used in conjunction with an appropriate thermostatic mixing valve to provide a safe maximum water temperature.

Advantages

- Vandal resistant: designed for intensive use in public places.
- More than 60% water and energy savings. Limited flow-rate and automatic shut-off.
- Comfort: smooth opening.
 - No splashing due to the adjustable flow-rate without dismantling the mechanism nor isolating water.

How to specify

Tempostop bib tap / timing 15 secs. nom. Code no. 746000

Tempostop bib lever tap / timing 15 secs. nom. Code no. 746410

Dimensions in mm