



### Tempostop urinal recessed

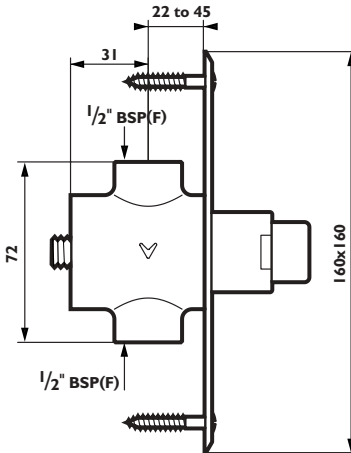

### Tempostop urinal (crosswall)

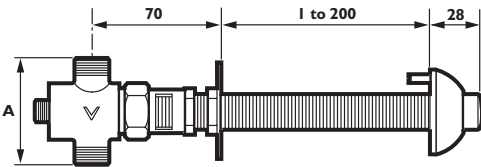

Dimensions in mm

### Data

Tempostop urinal recessed valve and Tempostop crosswall "through the wall" valve provides safe, hygienic automatic shut-off for all urinal applications. The Tempostop urinal crosswall can be installed 'through the wall' into a service area and is supplied with a crosswall length of 200mm.

Tempostop urinal controls are also available for recessed mounting. Solid brass body chrome plated.

Shut-off delay ~7sec.

Inlet 1/2" BSP(F) and pre-set flow-rate 0.25 l/sec., adjustable by the installer without isolating water.

### Code number

779427 - Tempostop urinal control, recessed with satin stainless steel wall plate 160x160.

777200 - Tempostop urinal control crosswall mount 200mm.

### Pressures and flow-rates

• Dynamic pressure	bar	0.5	1	2	3	4
1/2" model						
• Max. flow-rate	l/s	0.17	0.23	0.31	0.36	0.43
• Recommended pressure (dynamic)		0.5 to 4 bar				

### Description

Tempostop urinal provides automatic shut-off push-button valve for urinals.

- Shut-off delay ~7 sec.
- Inlet 1/2" or 3/4" (for stall, common or siphon action urinal).

### Advantages

- Hygiene - High resistance to vandalism: designed for intensive use in public places, chrome plated body, shock-and vandalproof mechanism.
- More than 50% water saving. Regulated flow-rate and automatic shut-off.
- Comfort: no splashing: the flow-rate is adjustable without dismantling the mechanism or cutting-off water. (Delabie patented)
- Low maintenance - Interchangeable cartridge mechanism
- Durable - tested to more than 500,000 operations.

### How to specify

Tempostop urinal recessed mount with satin stainless steel wall plate 160 x 160mm. Code no. 779427

Tempostop urinal crosswall mount 200mm complete with 1/2" BSP(M) 7 sec auto shut off valve. Code no. 777200