

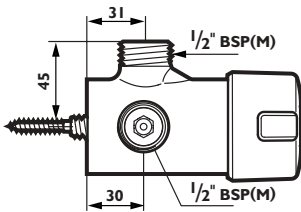


Tempomix exposed shower mixer

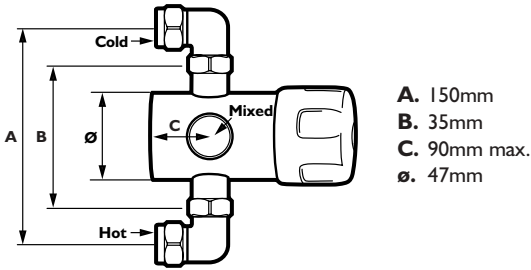

Tempomix recessed shower mixer

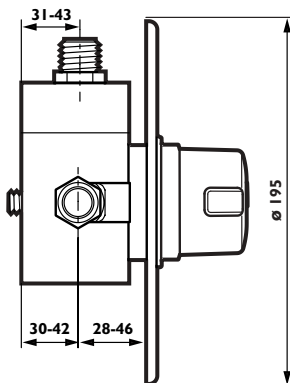

Dimensions in mm

Data

Automatic time flow mixer ~ 30 sec, adjustment of temperature by the control-knob, maximum temperature adjustable by the installer.

- Pre-set flow-rate 8 L/min, adjustable without cutting-off the water.
- Non-return valve and filters. Body in chrome plated brass.

Code numbers

790000 - Tempomix time flow shower mixer - exposed 15mm, 90mm centres.

790425 - Tempomix time flow shower mixer - recessed 15mm with wallplate 160mm x 160mm.

790925 - Tempomix time flow shower mixer - recessed 15mm with wallplate 195 Ø.

Pressures and flow-rates

Dynamic pressure	bar	0.5	1	2	3	4	5
Max. flow rate without shower head	l/s	0.15	0.21	0.28	0.33	0.38	0.42
Recommended pressure:		0.8 to 5 bar.					

Description

The Tempomix mechanical time flow mixer is suitable for individual or group shower applications in all public buildings - swimming pools, sports centres, schools and university hall of residences, caravan parks and factory shower applications. Tempomix is simple to install and easy to operate. Flow is activated by pressing the push button and automatically shuts off after a nominal 30 seconds (+5 / - 10 secs)

Users have full adjustment of the shower temperature between Hot (*blended*) and Cold water supply temperature. Tempomix re-opens at the previous set temperature.

Advantages

- Tempomix should be used in conjunction with a thermostatic mixing valve to provide safe water temperature control
- High resistance to vandalism: specifically designed to comply with intensive use in public places.
 - Reliable shock-proof mechanism
- More than 60% water and energy savings. Pre-set flow-rate 8 L/min. and automatic shut-off ~30 sec. delayed
- Comfort: smooth opening, automatic flow-restrictor and spray angle adjustable by the installer
- Low maintenance
- Scale and corrosion resistant
- Interchangeable cartridge
- Durable: Tested to 400,000 cycles

How to specify

Tempomix time flow shower mixer - Exposed 15mm.
Code no 790000

Tempomix time flow shower mixer - Recessed 15mm - wallplate 160x160. Code no 790425

Tempomix time flow shower mixer - Recessed 15mm - wallplate 195 Ø. Code no 790925